

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H02J 7/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/16879</b> <b>(43) International Publication Date:</b> 9 May 1997 (09.05.97)
<b>(21) International Application Number:</b> PCT/SE96/01390 <b>(22) International Filing Date:</b> 30 October 1996 (30.10.96) <b>(30) Priority Data:</b> 9503861-8      31 October 1995 (31.10.95)      SE <b>(71) Applicant (for all designated States except US):</b> XICON AB [SE/SE]; Ideon, S-205 12 Malmö (SE). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> WIKSTRÖM, Bo [SE/SE]; Jaktstigen 10, S-261 75 Asmundtorp (SE). <b>(74) Agents:</b> HANSSON, Anders et al.; Hansson Thyresson Patentbyrå AB, P.O. Box 73, S-201 20 Malmö (SE).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Swedish).</i>

**(54) Title:** SYSTEM FOR EQUALIZING THE LEVEL OF CHARGE IN BATTERIES**(57) Abstract**

A system for equalizing the charge level of batteries comprising battery cells (3) or battery blocks (9) connected in series. Controlled voltage converters (4) are on one side connected to a single or groups of battery cells (3) or battery blocks (9) and on another side connected to a common current path (5, 6), a positive conductor (5) thereof being connected to a positive pole (1) of the battery and the negative pole (2) thereof being connected to a negative pole (2) of the battery.

Särliga energin  
 kommer från  
 Votoverkät pänna

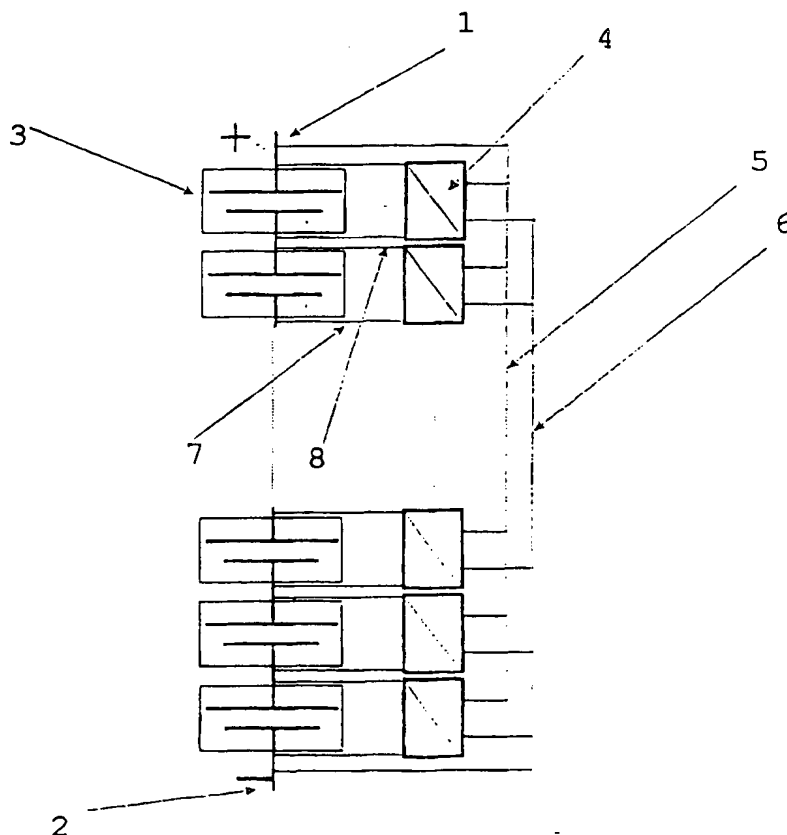

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

## SYSTEM FOR EQUALIZING THE LEVEL OF CHARGE IN BATTERIES

Technical field

The presently most used way to charge and discharge batteries is to connect charging or load to the pole bolts of the total battery. The battery  
5 consists normally of a number of cells which are connected in series. At charging or discharging the same current will go through all the battery cells.

Prior Art

10 At charging or discharging of batteries there are normally a control system, by varying degree of complexity, which controls the process. Charging or discharging are done by supplying or loading a current in the battery. The size of this current is controlled by a number of parameters e.g. current battery voltage, temperature at battery, battery performance, current  
15 charging level etc. One problem which occur by the use batteries connected in series is that the battery cells have different pole voltages, temperatures, performance, charging levels etc. One method, which is used to minimise this problem, is to equalise discharge the battery. I.e. that the whole battery is emptied of energy to get the cells on as equal charging level as possible,  
20 at the next charging cycle. As the demands of availability and lifetime increase, charging systems have been developed which can equalise charging. These systems have an electrical connection to each battery cell or battery block. This means that the main charging current is supplied as usual via the pole bolts. Beside that extra currents, to the battery cells or  
25 battery blocks which needs extra charging to reach full charging level, can be supplied via the separate connections. One disadvantage with this type of system is that cable arrangement becomes very complex, and that equalising only can be done at charging.

### Summary of the invention

An object of the present invention is to considerably avoid mentioned problems and by an equalising system direct charging currents between  
5 different battery cells or battery blocks in the battery during all operating conditions, without having an inconvenient cable installation.

These objects are reached by a voltage converter, mounted on each battery cell or battery block. These voltage converter units are connected to a common current path, which is connected to the pole bolts, of the total  
10 battery, where the energy is transferred from the cells which have a higher charging level, temperature, pole voltage etc. As this current path is connected the pole bolts of the total battery an equalisation of the charging levels is made.

The system can also have an alternative technical solution where  
15 energy is transferred from the common current path via the voltage converter units to the respective battery cell or battery block. The energy is now transferred in the opposite direction, compared to the above solution, but this gives the same effect if the energy now is supplied to the battery cells or battery blocks which have a lower charging level, temperature, pole voltage  
20 etc. compared to the other battery cells or battery blocks.

### Brief description of the drawings

The invention will now be described below with the schematic  
25 connection diagrams where fig. 1 shows a battery where the charge level equalising system is connected to each battery cell in the battery. Fig. 2 shows a battery where the charge level equalising system is connected to each battery block in the battery.

Detailed description

Fig.1 shows in principal a connection diagram of a system for charge level equalising in batteries, where the system is connected on battery cell level. The battery having a positive pole 1 and a negative pole 2 comprises a number of cells 3 connected in series. The system for charge level equalising comprises a number of voltage converters 4 which are remotely controlled by a in relation to the battery centrally oriented control unit. The voltage converters 4 are on one side connected to positive pole 8 and negative pole 7, respectively, of the battery cells. The positive pole 10 or negative pole 11 of the battery blocks. The voltage converters 4 are on the other side connected to a positive pole 5 and a negative pole 6 of a common current path. The positive pole 5 of the common current path is connected to the positive pole 1 of the battery. The negative pole 6 of the common current path is connected to the negative pole 2 of the battery.

The voltage converters 4 can be designed to obtain energy from one or more battery cells 3 and transfer the energy to the common current path 5,6. Alternatively the voltage converters 4 can be designed to obtain energy from the common current path 5,6 and transfer energy to one or several battery cells 3.

Fig.2 shows in principal a connection diagram of a system for charge level equalising where the system has been connected on battery block level 9. The function of the system is equal to that described with reference to fig 1 with the exception that the battery cells 3 have been replaced by the battery blocks 9.

The system for charge level equalising in batteries can be controlled by different algorithms, which means during the charging phase of the total battery, in spite of the series connections, a part of the charging current can be directed to the different battery cells 3 or the battery blocks. In this way these can be charged individually to the intended level. In the same way at

discharging of the battery, in spite of connections in series, the current can be directed to the intended level for respective battery cell 3 or battery block 9.

The voltage converters 4 are also provided with devices for sensing individual temperatures and pole voltages of the battery cells 3 or battery blocks 9. The voltage converters are controlled from a, for the battery assembly central control unit which via wire or wireless communicates with the voltage converters 4. The voltage converters mentioned above can also be connected in other ways to each battery cell 3 or battery block 9. Fig 3 shows an example of a so called reduced connection i.e. the charging level of each battery cell can be controlled in spite of the fewer numbers of voltage converters than the number of battery cells.

Fig. 4 shows an arrangement where the voltage converters have been connected to a common ground. This procedure is specially applicable in low voltage battery systems.

## CLAIMS

1. A system for charge level equalising in batteries comprising battery cells  
(3) or battery blocks (9) connected in series *characterised* by  
5        controllable voltage converters which on one side are connected to  
single or groups of battery cells (3) or battery blocks (9) and on the  
other side are connected to a common current path (5, 6), a positive  
conductor (5) thereof being connected to the positive pole (1) of the  
battery and the negative conductor (6) thereof being connected to the  
10        negative pole (2) of the battery.
2. A system for charge level equalising in batteries according to claim 1,  
*characterised* in  
that        the controllable voltage converters are designed to transfer energy to  
15        or from the battery cells (3) or battery blocks (9) to control the level of  
charging to the desired level in each battery cell or battery block.
3. A system for charge level equalising in batteries according to claim 1,  
*characterised* in  
20        that        the voltage converters (4) are connected to measure individual pole  
voltages of the battery cells (3) or battery blocks (9) and to transmit  
data thereof to a control system that is central to the battery  
arrangement.
- 25        4. A system for charge level equalising in batteries according to claim 1,  
*characterised* in  
that        the voltage converters (4) are arranged to measure individual  
temperatures of the battery cells (3) or battery blocks (9) and to  
transmit data thereof to a control system that is central to the battery  
30        arrangement.

1/3

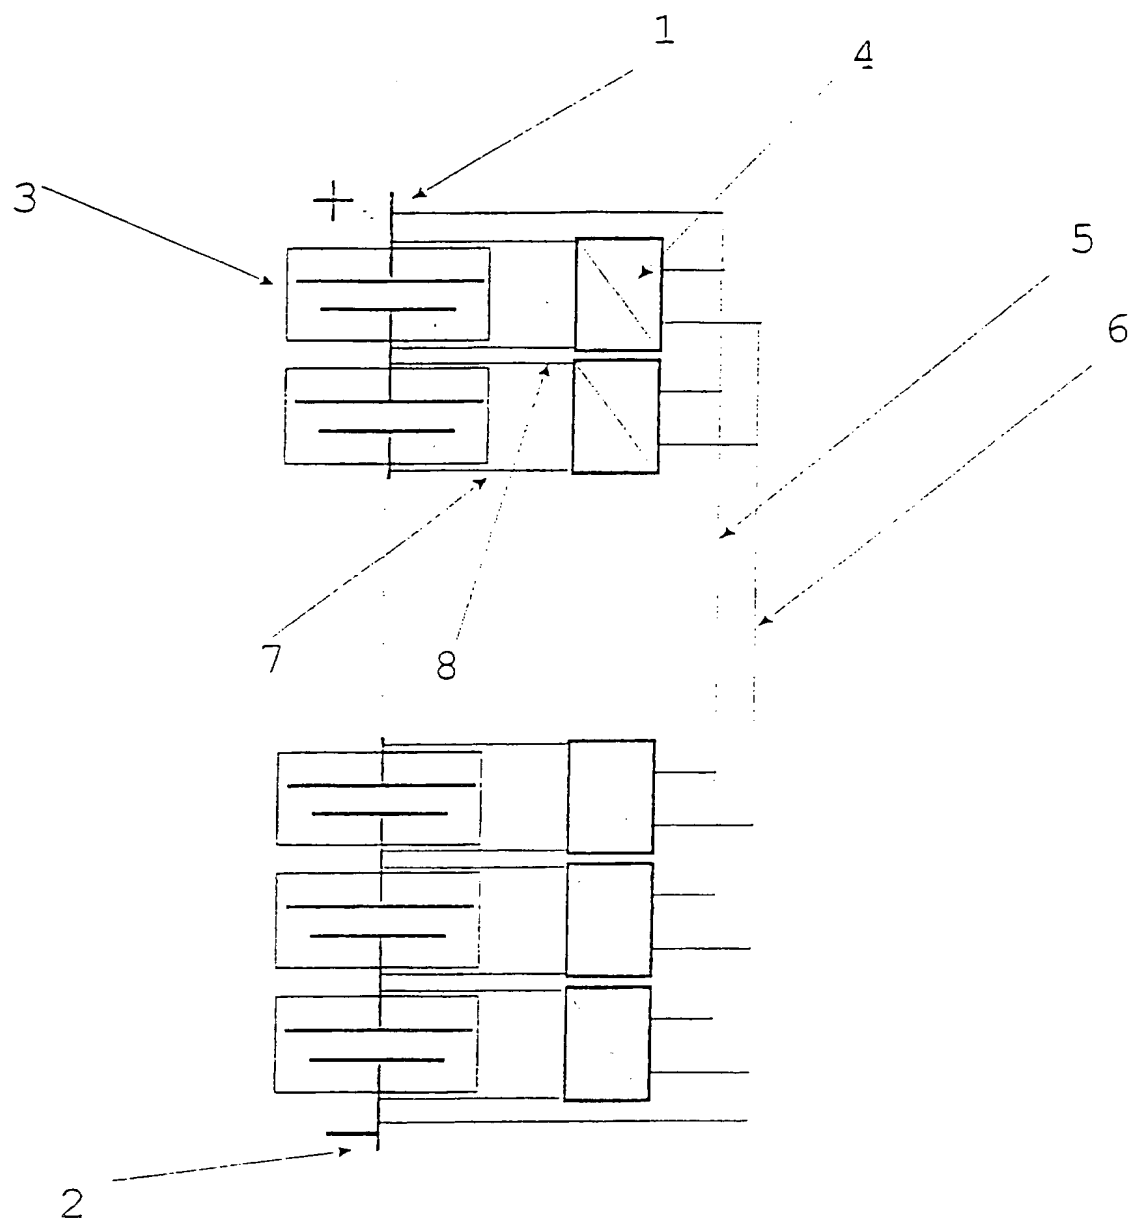


Fig. 1

2/3

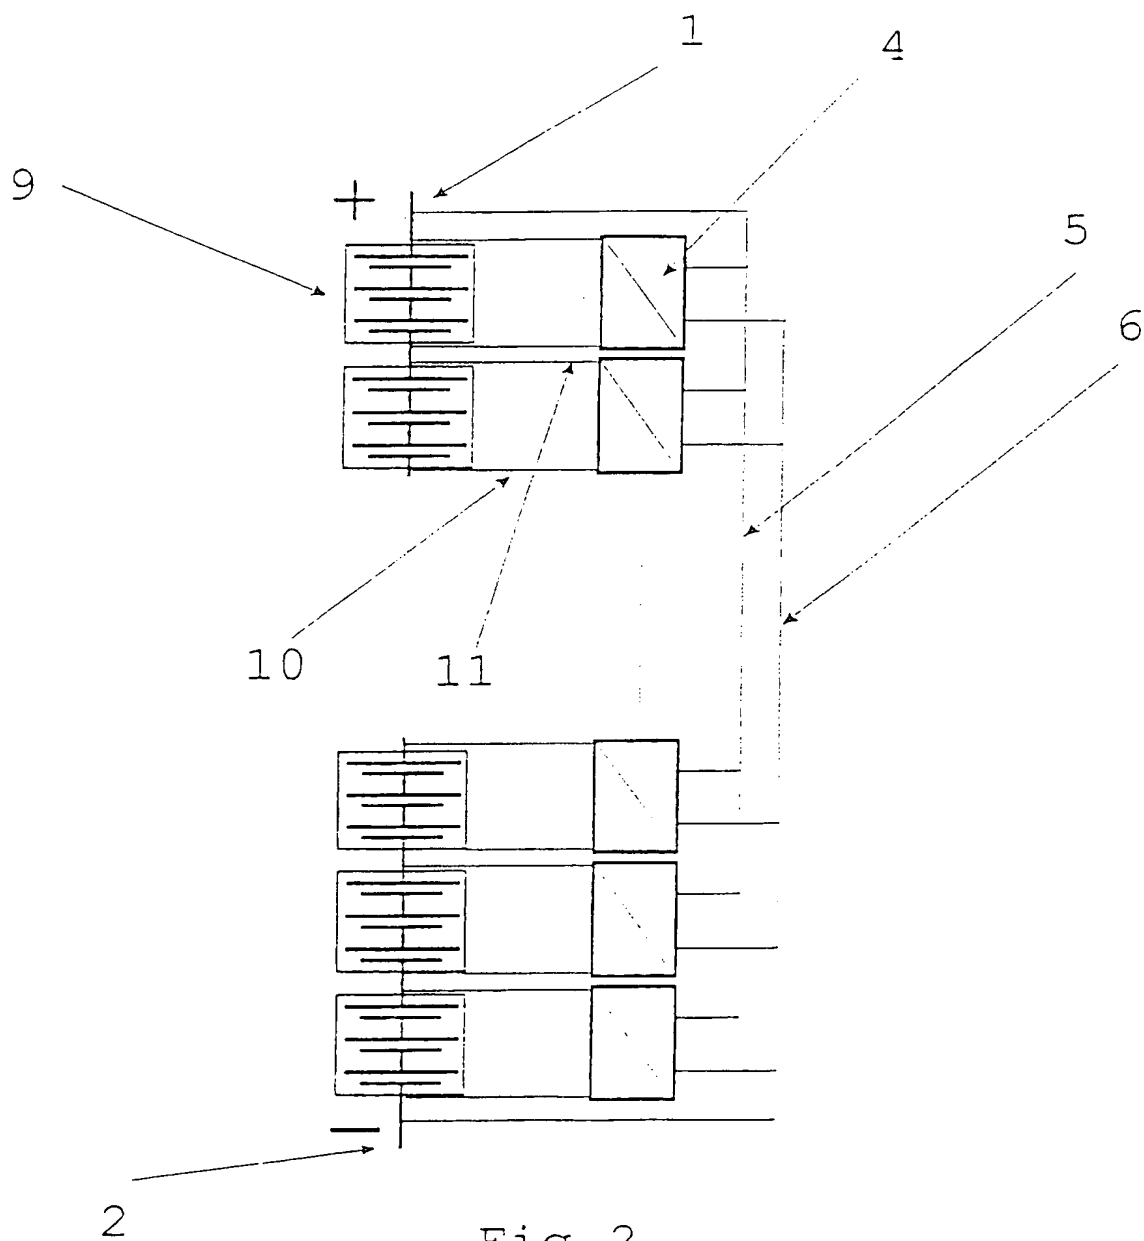


Fig. 2

3/3

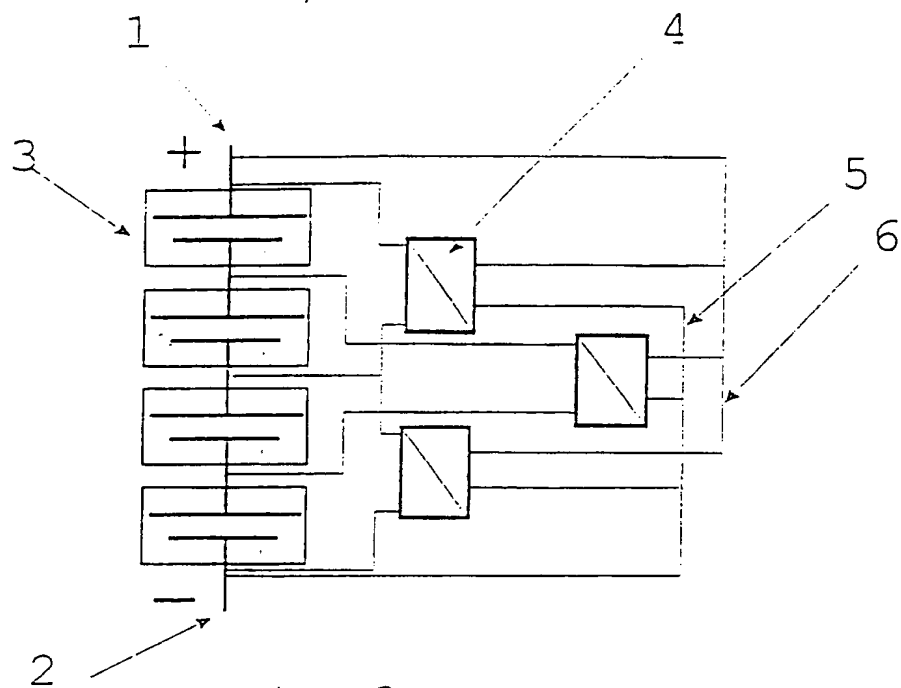


Fig. 3

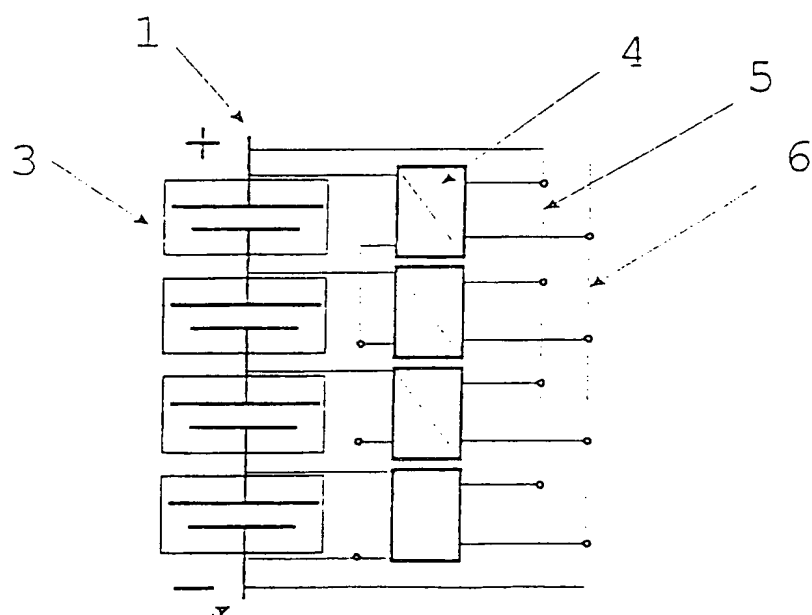


Fig. 4

1  
INTERNATIONAL SEARCH REPORTInternational application No.  
PCT/SE 96/01390

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: H02J 7/00 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H02J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0662744 A2 (GENERAL MOTORS CORPORATION), 12 July 1995 (12.07.95), se hela dokumentet --	1-4
A	WO 9515023 A1 (THOMSON-CSF), 1 June 1995 (01.06.95), page 1, line 1 - page 3, line 3 -- -----	1-4
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
24 February 1997		05 -03- 1997
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Håkan Sandh Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

03/02/97

International application No.  
PCT/SE 96/01390

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0662744	12/07/95	JP-A- 7212984 US-A- 5592067	11/08/95 07/01/97
WO-A1- 9515023	01/06/95	CA-A- 2152929 EP-A- 0680668 FR-A,B- 2713019 JP-T- 8506477	01/06/95 08/11/95 02/06/95 09/07/96